

MPB32 Pro & APB32 Pro PIPE BEVELING SYSTEMS

MANUAL & AUTOMATIC SYSTEMS PRODUCE ACCURATE WELD PREPARATIONS IN A SINGLE PASS

The Steelmax **MPB32 Pro** and **APB32 Pro** pipe beveling systems produce consistent, high-quality weld preparations in a single pass. With manual or automatic feed, the **MPB32 Pro** and **APB32 Pro** easily mount to the outside edge of pipe or tubing and can create a 13/16" maximum bevel width. By attaching to the pipe's circumference, the **MPB32 Pro** and **APB32 Pro** automatically compensate for out-of-round pipe and tubing and produce a consistent land dimension and bevel angle around the pipe; giving the user highly repeatable and consistent fit-up. Outfitted with a heavy-duty, industrial motor with variable speed control, the **MPB32 Pro** and **APB32 Pro** turn at the optimal speed for efficient beveling of ferrous and non-ferrous pipes.

The **MPB32 Pro** is a manually operated machine while the **APB32 Pro** automatically feeds itself around the pipe. Both machines can mount to pipe or tubing with a minimum diameter of 10" and can bevel outside diameters up to 32" and 1/8" up to 3/4" wall thicknesses. With an optional attachment, both the **MPB32 Pro** and **APB32 Pro** can bevel pipe of any diameter over 32" making this an incredibly versatile solution.



MPB32 Pro Manual Pipe Beveling Machine



APB32 Pro Automatic Pipe Beveling Machine

FEATURES

- Simple set-up and operation
- Accurate bevel depth and bevel angle adjustment
- Complete weld preparation in a single pass (at 45°, maximum 15 mm bevel width)
- Suitable for pipe thickness from 1/8" (3 mm) up to 3/4" (20 mm)
- Both machines can be used to bevel plate as well
- Variable speed motor for optimized milling of various materials

Steelmax
The tools of innovation.


PORTABLE PIPE BEVELING MACHINES FROM STEELMAX®

Technical Specifications

	MPB-32 Pro	APB-32 Pro
Power Supply	115 VAC 60Hz 2,400W	115 VAC 60Hz 2,400W
Pipe Diameter Range	10" and Larger (>250 mm)	10" and Larger (>250 mm)
Bevel Angle Range	15-45°	15-45°
Maximum Bevel Depth @ 45 degrees (A)	5/8" (15 mm)	5/8" (15 mm)
Maximum Bevel Width (B)	13/16" (21 mm)	13/16" (21 mm)
Minimum Pipe Wall Thickness	1/8" (3 mm)	1/8" (3 mm)
Maximum Pipe Wall Thickness	3/4" (20 mm)	3/4" (20 mm)
Weight	41 lbs (18.6 kg)	90 lbs (41 kg)
Part Number	SM-PB-MPB-32-PRO	SM-PB-APB-32-PRO



Easily set the bevel depth

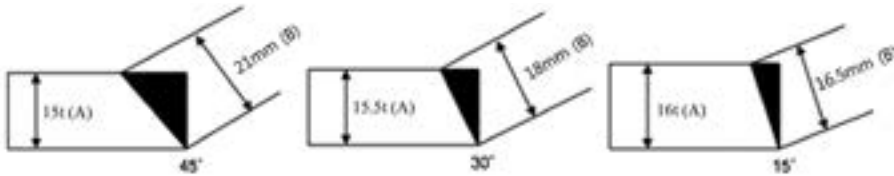

Accessories

SM-PB-API020-LD	APB-32 Pro Pipe Attachment for Pipe Diameters Above 32"
-----------------	---

Spare & Wearing Parts

SM-PB-CP2100-CA	Cutter Head Assembly for APB-32 Pro and MPB-32 Pro (without inserts)
SM-PB-CM2100-10	Cutting inserts (Package of 10)
SM-PB-CP2100-09	Cutter Wedge for APB-32 Pro and MPB-32 Pro (each)
SM-PB-CP2100-08	Cutter Insert Screw (each)



Steelmax

The tools of innovation.

For ordering and customer service, or to request detailed product information or demonstration videos, contact:

877-833-5629

STEELMAX.COM

sales@Steelmax.com

Fax: 303-690-9172

